

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number  
**WO 03/089952 A2**

- (51) International Patent Classification<sup>7</sup>: **G01S 1/04, H04B 1/38**
- (21) International Application Number: **PCT/US03/12115**
- (22) International Filing Date: **18 April 2003 (18.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**10/126,449 19 April 2002 (19.04.2002) US**
- (71) Applicant: **SIRF TECHNOLOGY, INC.** [US/US]; 148 E. Brokaw Road, San Jose, CA 95112 (US).
- (72) Inventors: **BLOEBAUM, L., Scott**; 103 Battery Point Place, Cary, NC 27513 (US). **BHARTI, Piyush**; 173 Roseberry Avenue, London, Greater London EC1R 4UP (GB). **CHUNG, Sherk**; 2000 Crystal Springs Road, Apt. 24-12, San Bruno, CA 94066 (US). **VAN ROY, Benjamin**; 1501 Hillsdale Blvd. #103, San Mateo, CA 94402 (US). **MANN, Wallace**; 16 Madera Way, Mill Valley, CA 94941 (US).
- (74) Agent: **KWOK, Edward, C.**; MacPherson Kwok Chen & Heid LLP, 2001 Gateway Place, Suite 195E, San Jose, CA 95110 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,

[Continued on next page]

(54) Title: COMPENSATION FOR FREQUENCY ADJUSTMENT IN MOBILE COMMUNICATION-POSITIONING DEVICE WITH SHARED OSCILLATOR

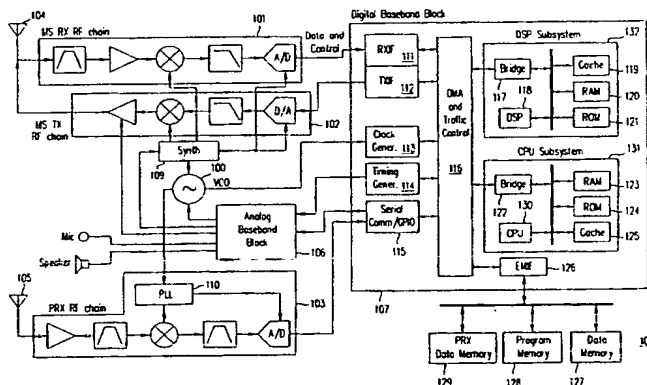

(57) Abstract: In a mobile communication device, a method for compensating for a frequency adjustment in an oscillator shared between a communication circuit and a positioning signal receiver is provided. In one embodiment, the method begins to receive and store a positioning signal at a first time point. When, at a second time point, the operating frequency of the shared oscillator is adjusted, the frequency adjustment is recorded. After the positioning signal is completely received and stored, the processing of the positioning signal takes into consideration the frequency adjustment. In that embodiment, the processing hypothesizes a frequency shift in the received positioning signal. According to another aspect of the present invention, a method for determining the operating frequency of an oscillator detects a beginning time point of a reference signal received by the mobile communication device and enables a counter to count in step with a clock signal derived from the oscillator. When an ending time point of the reference signal is received by the mobile communication device, the count is stopped, and the frequency of the oscillator is determined based on the count in the counter and an expected time that elapsed between the beginning time point and the ending time point.

WO 03/089952 A2



UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

**Published:**

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPENSATION FOR FREQUENCY ADJUSTMENT IN MOBILE  
COMMUNICATION-POSITIONING DEVICE  
WITH SHARED OSCILLATOR

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a mobile communication device with a positioning capability. In particular, the present invention relates to a mobile communication device (e.g., a cellular telephone) that is also capable of receiving a global positioning system (GPS) signal, and which shares an oscillator between the communication and positioning functions.

2. Description of the Related Art

The utility of a mobile communication device (e.g., a cellular telephone) is enhanced if it is provided the additional capability of receiving and processing global positioning system (GPS) signals that can be used to determine the position of the mobile communication device.

To provide for both positioning and communication functions, it is possible to share a local oscillator between the receiver and transmitter of the communication circuit and the GPS signal receiver. While sharing a local oscillator can reduce the cost and bulkiness of such a mobile communication device, there are some practical problems to be overcome to achieve high performance. For example, in cellular communications, when a mobile communication device leaves the service area of a base station and enters into the service area of another base station, a "hand-off" procedure takes place in which the mobile communication device tunes into the operating frequency or channel of the new base station. During the hand-off, it is often necessary to adjust the offset (i.e., deviation from the base station's "nominal center frequency"), as each base station may have a different offset. In degraded signal conditions, continuous tracking of a carrier may also require an offset frequency adjustment. However, if such an adjustment is made during the acquisition of a GPS signal, both the mixing frequency and the sampling frequency of the GPS receiver -- used in down-converting and digitizing the GPS signal, respectively -- are affected. The received signal may yield an erroneous result, or even a failure to detect the GPS signal. In fact, in one system, a 0.05 parts-per-million (ppm) adjustment has the effect of a 79 Hz shift in the carrier frequency in the received GPS signal.

One approach avoids the corruption of the GPS signal by locking the communication circuit out from accessing the oscillator for frequency adjustment so long as a GPS signal acquisition is in process. However, such an approach is undesirable because it prevents the

mobile communication device from establishing contact with one or more base stations while a GPS signal is being acquired, which may lead to temporary loss of communication service. Also, such an approach complicates the control software in the mobile communication device, thereby deterring manufacturers from incorporating positioning capability in their mobile communication devices.

In GPS signal detection, one source of uncertainty in the carrier modulation frequency in the received signal is the "clock Doppler," which results from the unknown syntony between the clock on the signal source (e.g., a GPS satellite) and the receiver's own clock. Precise knowledge of the local oscillator's frequency can reduce the frequency search space ("Doppler range") for the GPS signal. At any given time, the actual frequency of a local oscillator depends on a number of variables, such as manufacturing variations, temperature, aging and operating voltage. Oscillators used in signal sources (e.g., GPS satellites) are typically well-characterized and are tuned to the specified frequency with high accuracy. Because of their cost, high power requirements, and bulkiness, however, such oscillators are unsuited for use in a mobile communication device. To more accurately determine the operating frequency of a local oscillator, the prior art typically requires a more costly oscillator then conventionally found in a mobile communication device. Others require a complex calibration procedure to tune the oscillator to a precision carrier frequency. The latter approach is disclosed, for example, in U.S. Patent 5,874,914 to Krasner, entitled "GPS Receiver utilizing a Communication Link." Neither approach is satisfactory from a cost and performance standpoint.

## SUMMARY

According to one embodiment of the present invention, provided in a mobile communication device, is a method for compensating for a frequency adjustment in an oscillator shared between a communication circuit and a positioning signal receiver. In one embodiment, the method includes (a) at a first point in time, beginning receiving and storing into a storage device the positioning signal; (b) at a second time point, adjusting a frequency of the oscillator by a given amount; (c) recording the frequency adjustment; (d) at a third time point, completing receiving and storing of the positioning signal from the positioning signal receiver; and (e) processing the positioning signal, taking into consideration the frequency adjustment. In one implementation, the second time point is recorded as the time at which the frequency adjustment of the oscillator is made. Having the knowledge of the time at which the frequency adjustment is made, the processing searches for a frequency shift in the received positioning signal between the second time and the third time. In another implementation, the amount by which the

frequency of the oscillator is adjusted is recorded, and the processing searches for a time point at which the frequency adjustment of the oscillator is made. In one implementation, the processing integrates a correlation function.

The present invention is applicable to GPS processing using aiding data, such as satellite ephemeris data. The present invention is particularly applicable to cellular communication in which an oscillator adjustment may be made when the mobile receiver moves between service areas of base stations.

Thus, accurate processing of the positioning data is ascertained without preventing the communication circuit from accessing the shared oscillator while positioning data is being acquired.

According to another aspect of the present invention, a mobile communication device determines an operating frequency of an oscillator based on a reference signal from a reliable time base. In one embodiment, a beginning time point of the reference signal is received by the mobile communication device. When the beginning time point of the reference signal is detected, a counter is enabled to count a number of cycles in a clock signal derived from the oscillator. The ending time point of the reference signal is then detected. Upon detecting the ending time point of the reference signal, the counter is stopped to prevent the counter from further counting. Finally, the frequency of the oscillator is determined based on the count in the counter and an expected time that elapsed between the beginning time point and the ending time point.

The present invention can use reference signals having a known duration in time, or having recurring events in the reference signal that recurs at a fixed frequency. In some implementation, the frequency of the oscillator so derived can be further adjusted, taking into account the processing times in the mobile communication device for detecting the beginning time point and the ending time point.

Using the method of the present invention, the operating frequency of a local oscillator can be determined to the accuracy of the oscillator of the base station oscillator, without incurring the expense or inconvenient bulkiness of the more costly, higher precision oscillator typically found in base stations or less mobile equipment. In a GPS signal receiver, by removing the uncertainty in oscillator frequency, the Doppler range over which the positioning signal receiver software searches can be further limited.

The present invention is better understood upon consideration of the detailed description below and the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a block diagram of mobile communication device 100 to which a method of the present invention is applicable.

Figure 2 shows a flow chart of method 200 that compensates for the frequency adjustment in shared local oscillator 108, in accordance with one embodiment of the present invention.

Figure 3 shows a block diagram of mobile communication device 100 to which a method of the present invention is also applicable.

Figure 4 illustrates method 400 for measuring the operating frequency of shared local oscillator 103, in accordance with one embodiment of the present invention.

To facilitate comparison between figures and to simplify the detailed description below, like reference numerals are used for like elements in the figures.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention provides a method that compensates the frequency adjustment effects in the positioning signal detection process. According to another aspect of the present invention, a method for accurately determining the frequency of a local oscillator is provided.

Figure 1 shows a block diagram of mobile communication device 100 to which a method of the present invention is applicable. Mobile communication device 100 can be, for example, a cellular telephone handset. As shown in Figure 1, mobile communication device 100 includes communication receiver 101, communication transmitter 102, positioning signal receiver 103, analog baseband circuit 106, digital baseband circuit 107, shared local oscillator 108 and synthesizer 109. In mobile communication device 100, shared local oscillator 108 is the frequency source for communication receiver 101, communication transmitter 102, and positioning signal receiver 103. Shared local oscillator 108 can be implemented, for example, by a voltage-controlled oscillator. Antenna 104 serves both communication receiver 101 and communication transmitter 102, and antenna 105 serves positioning signal receiver 103.

A communication signal coupled by antenna 104 into communication receiver 101 is band-pass filtered, amplified and then down-converted by mixing with a signal from synthesizer 109 to a baseband signal. (The signal from synthesizer 109 has the expected carrier modulation frequency.) The baseband signal so obtained is low-pass filtered and sampled for digital processing in digital baseband circuit 107. A communication signal to be transmitted is provided as a digital signal from digital baseband circuit 107. The digital signal is converted into analog form, filtered and modulated by mixing with a carrier frequency provided by synthesizer 109. The modulated signal is amplified and transmitted through antenna 104. The positioning signal received at positioning signal receiver 103 is processed in substantially the same manner as described for the communication signal, except that the expected modulation carrier frequency, rather than generated by a synthesizer (e.g., synthesizer 109), is provided by a PLL, which multiplies the frequency of shared local oscillator 108 by a factor of 100 or more.

Analog baseband circuit 106's functions include enabling communication transmitter 102 to transmit a communication signal, providing a frequency adjustment to shared local oscillator 108, and changing the frequency in synthesizer 109. As mobile communication device 100 switches between base stations, analog baseband circuit 106 directs synthesizer 109 to switch between the channels of the base stations. As explained above, switching between base stations or tracking a carrier signal during degraded signal conditions may necessitate a frequency adjustment to shared local oscillator 108. In addition, as shown in Figure 1, analog baseband circuit 106 may include a codec and interfaces to a microphone and a speaker for processing voice communication. The codec quantizes a voice signal from the microphone into digital samples to be processed by digital baseband circuit 107 and reconstructs an analog audio or voice signal from digital samples provided by digital baseband circuit 107. The analog audio signal is replayed at the speaker.

Digital baseband circuit 107 includes receiver interface (RXIF) 111 and transmitter interface (TXIF) 112 to communication receiver 101 and communication transmitter 102, respectively. The output signal of shared local oscillator 108 provides a reference signal for clock generation circuit 113 to provide the internal clock signals distributed within digital baseband circuit 107 and analog baseband circuit 106 (e.g., to drive sampling of a voice codec). The internal clock signals generate from timing generation circuit 114 timing strobes used both internally in digital baseband circuit 107 and analog baseband circuit 106. Various serial communication and input/output (I/O) ports 115 are provided in digital baseband circuit 107 for communication with peripheral devices, positioning signal receiver 103 and analog baseband circuit 106.

Digital baseband circuit 107, which can be implemented as an application specific integrated circuit (ASIC), includes central processing unit (CPU) subsystem 131, which performs and controls the communication functions of mobile communication device 100. Such communication functions include executing the communication protocol stack, peripheral hardware control, man-machine interface (e.g., keypad and graphical user interfaces), and any application software. As shown in Figure 1, in this embodiment, external memory modules 127, 128 and 129 are coupled to digital baseband circuit 107 through external memory interface (EMIF) 126. External memory modules 127, 128 and 129 are used in this embodiment to provide data memory, program memory and positioning data memory for CPU subsystem 131. (Positioning data memory stores samples of a positioning signal and data used in positioning signal detection.) In other embodiments, data memory, program memory and positioning data memory can be provided by built-in memory modules in digital baseband circuit 107. Alternatively, positioning data memory 129 and data memory 128 can reside in the same physical memory module. As shown in Figure 1, CPU subsystem 131 communicates with RXIF 111, TXIF 112, clock generation circuit 113, timing generation circuit 114 and communication and I/O ports 115 over a direct memory access (DMA) and traffic control circuit 116.

As shown in Figure 1, CPU subsystem 131 includes CPU 130, random access memory (RAM) 123, read-only memory (ROM) 124 and cache memory 131. CPU 130 communicates with RAM 123, ROM 124 and cache memory 131 over a processor bus. Bridge 122 allows data to flow between the processor bus and DMA and traffic control circuit 116. As known to those skilled in the art, software executed by CPU 130 can be stored in a non-volatile fashion in ROM 124 and also in external program memory 128. RAM 123 and cache memory 131 provide the memory needs of CPU 130 during its operation.

In the embodiment shown in Figure 1, digital signal processor (DSP) subsystem 132 is provided in digital baseband circuit 107. DSP subsystem 132 can be used to execute computationally intensive tasks, such as encoding and decoding voice samples, and executing the tasks of the physical layer in communication with a station. DSP subsystem 130 can be implemented, for example, substantially the same organization as CPU subsystem 131, and provided similar access to external memory modules 127, 128 and 129 through EMIF 126.

The positioning signal receiver software, which detects GPS signals from multiple GPS satellites to determine the location of mobile communication device 100, may be run on either CPU subsystem 131 or DSP subsystem 132. In this embodiment, the digitized samples of the received GPS signal are stored in memory. The stored GPS signal samples are then later



retrieved and processed to search for the GPS satellite, the code phase and frequency shift ("Doppler") that would provide the received signal. In one embodiment, positioning receiver software searches for a peak in the modulus of a complex correlation integral under hypothesized code phase, Doppler and integration time values. One example of such positioning receiver software is disclosed in co-pending patent application ("Coping Application"), serial no. \_\_\_\_\_, entitled "Method for Optimal Search Scheduling in Satellite Acquisition" by J. Stone et al., filed on or about the same day as the present application, Attorney Docket number M-12558 US, assigned to Enuvis, Inc., which is also the Assignee of the present application. The disclosure of the Copending Application is hereby incorporated by reference in its entirety.

If the mobile communication device, in response to communication with a base station, adjusts the frequency of shared local oscillator 108 while the GPS signal is being captured, a discontinuity appears as a step shift in carrier frequency in the digitized GPS signal. The present invention compensates for this carrier frequency shift in the complex correlation integral.

Figure 2 shows a flow chart of a method that compensates for the frequency adjustment in shared local oscillator 108, in accordance with the present invention. As shown in Figure 2, at step 201, the data processing portion of the positioning signal receiver software (PRXPF) receives a request for the user's position (e.g., the user selecting a "get position" command from a menu), or from an external source (e.g., a protocol request in a message relayed from the base station). At step 202, PRXPF retrieves aiding data (e.g., GPS ephemeris, approximate location, and time) from local storage or memory, or from an external source (e.g., by protocol messages to a server sent over a radio communication link to a base station). At step 203, the control portion of the positioning signal receiver software (PRXCF) initializes positioning signal receiver 103 to begin storing samples between time  $t_0$  to time  $t_2$ . Time may be measured, for example, in mobile communication device 100's local time base or relative to a timing event in the communication link between mobile communication device 100 and a base station (e.g., a frame boundary in the radio communication interface to a base station). At time  $t_0$ , the contribution to the residual carrier frequency due to shared local oscillator 108 should ideally be zero.

Suppose at time  $t_1$  ( $t_0 < t_1 < t_2$ ), mobile communication device 100 adjusts the frequency of shared local oscillator 108 by an amount such that the residual carrier frequency in the positioning signal samples changes by  $\Delta f_1$ . Thus, at step 204, a record is made in mobile communication device 100, noting the time of the frequency adjustment and the amount of the frequency adjustment. At time  $t_2$  (step 205), PRXCF turns off positioning signal receiver 103.

At step 206, using the knowledge of the time and amount of the frequency adjustment, PRXPF performs the complex correlation integration using different hypotheses of a frequency offset due to shared local oscillator 108, according to whether the integration time limits are with the  $[t_0, t_1]$  interval or  $[t_2, t_3]$  interval. That is:

$$f_{vco}(t) = 0, \text{ for } t_0 < t < t_1$$

$$f_{vco}(t) = \Delta f_1, \text{ for } t_0 < t < t_1$$

At step 207, using the compensated integration of step 206, PRXPF executes the remainder of PRXPF to obtain the pseudo-range and, consequently, the position of mobile communication device 100.

For any reason, if either the frequency adjustment time  $t_1$  or the amount of frequency adjustment cannot be ascertained, the frequency adjustment time  $t_1$  or the amount of frequency shift due to shared local oscillator 108 (i.e.,  $\Delta f_1$ ) are considered additional search parameters. For example, if the frequency adjustment time  $t_1$  is known, but the frequency adjustment amount is not known, multiple hypothetical values for  $\Delta f_1$  can be used to search for  $\Delta f_1$ . Alternatively, if the frequency adjustment time  $t_1$  is not known, but the frequency shift due to shared local oscillator 108 is known, multiple hypothetical values for  $t_1$  can be used to search for time  $t_1$ . Of course, if neither the frequency adjustment time  $t_1$  nor the frequency shift due to shared local oscillator 108 is known, both the time and frequency parameter spaces have to be searched. In any case, the frequency adjustment software in the mobile communication device notifies the PRXPF that such an adjustment has occurred, and provides as much information related to the adjustment as is available.

Figure 3 shows a block diagram of mobile communication device 300, to which is a method of the present invention is also applicable. Unlike mobile communication device 100 of Figure 1, mobile communication device 300 uses a CPU or DSP 151 which resides outside of digital baseband circuit 107. Other than where the positioning signal receiver software and data reside and execute, the operation of mobile communication device 300 and mobile communication device 100 with respect to location determination and compensation for frequency adjustment in shared local oscillator 108 are substantially identical.

According to another aspect of the present invention, the frequency of a local oscillator (e.g., shared local oscillator 108 or the higher frequency output signal of a phase-locked loop) can be determined using the oscillator of a base station. The present invention uses a timing

signal of known duration, or having events of known recurring frequency, as a reference or “stop watch” signal to measure the actual local oscillator frequency. For example, in a CDMA network, a “short code” of  $26 \frac{2}{3}$  millisecond duration is broadcast on a pilot channel. The frequency of the short code rollover at 37.5 Hz can be used for synchronization. Alternatively, a “long code” broadcast on a CDMA network can also be used to synchronize a 10 MHz source. Each code has a starting point and an ending point indicated by a predetermined pattern. Similarly, in a GSM network, the Broadcast Control Channel (BCCH) transmitted by the base station includes a Synchronization Channel (SCH) having counts indicating the positions of the current frame within a multi-frame, super-frame and hyper-frame structures. The multi-frame, super-frame and hyper-frame structures have respective durations of 0.235 seconds, 6.12 seconds and approximately 3 hours and 29 minutes. Thus, in a GSM network, the starting points of successive multi-frames can be used as fixed time intervals. Other intervals inherent in the GSM air-interface frame structure can also be used as fixed time intervals. In addition, a counter is provided in the hardware that is clocked by a clock signal generated from shared local oscillator 108. In one embodiment, a nominally 200 MHz signal from a PLL in positioning signal receiver 103 is used to clock the counter.

Figure 4 illustrates method 400 for measuring the operating frequency of shared local oscillator 103, in accordance with the present invention. As shown in Figure 4, step 401 detects a starting point in the selected reference signal from the base station. At step 402, when the starting point in the reference signal is detected, the counter is reset to enable count, incrementing one for each cycle of its input clock signal. In one embodiment, detecting the starting point and starting the counter can be accomplished by software running in CPU subsystem 130. In other embodiments, these functions can be carried out in hardware. At step 403, when the ending point of the reference signal is detected, the counting is disabled. At that time, the count in the counter represents the number of clock cycles elapsed between the starting and ending point of the referenced signal (i.e., the fixed time interval). The frequency of shared local oscillator 108 is thus simply this fixed time interval divided by the count in the counter. An adjustment to the count may be desirable to account for the latencies in signal detection and the counter operations for higher accuracy.

In one embodiment, shared local oscillator 108 can operate between 10-25 MHz. A PLL in positioning signal receiver 103 multiplies the oscillator frequency to 200 MHz. Theoretically, the uncertainty in this 200 MHz signal under method 400 in that embodiment is estimated to be 10 Hz. However, nondeterministic latencies (e.g., due to the tasks in CPU subsystem 130) brings the uncertainty up to about 100 Hz.

Using the method of the present invention, the operating frequency of shared local oscillator 108 can be determined to the accuracy of the oscillator of the base station oscillator, without incurring the expense or inconvenient bulkiness of the more costly higher precision oscillator typically found in base stations. By removing the uncertainty in oscillator frequency, the Doppler range over which the positioning signal receiver software searches can be further limited.

The above detailed description is provided to illustrate specific embodiments of the present invention and is not intended to be limiting. Numerous variations and modifications within the scope of the present invention are possible. For example, the detailed description above describes a system in which the positioning signal receiver stores the sampled received signal and later retrieves the stored data for processing. Another embodiment which processes the sampled data as they are sampled is within the scope of the present invention. The present invention is set forth in the following claims.

CLAIMS

We claim:

1. In a mobile communication device, a method for compensating for a frequency adjustment in an oscillator shared between a communication circuit and a positioning signal receiver, comprising:

at a first point in time, beginning receiving into a positioning signal received from the positioning signal receiver;

at a second time point, adjusting a frequency of the oscillator;

recording a frequency adjustment of the oscillator;

at a third time point, completing receiving the positioning signal into the positioning signal receiver; and

processing the positioning signal, taking into consideration the frequency adjustment.

2. A method as in Claim 1, wherein the recording comprises recording the second time point as the time at which the frequency adjustment of the oscillator is made.

3. A method as in Claim 2, wherein the processing hypothesizes a frequency shift in the received positioning signal between the second time and the third time.

4. A method as in Claim 1, wherein the recording comprises recording an amount by which the frequency of the oscillator is adjusted.

5. A method as in Claim 4, wherein the processing hypothesizes a time point at which the frequency adjustment of the oscillator is made.

6. A method as in Claim 1, wherein the processing comprises integrating a correlation function.

7. A method as in Claim 6, wherein the processing comprises searching for a code phase for which the correlation function has a significant value.

8. A method as in Claim 6, wherein the processing comprises searching for a Doppler frequency at which the correlation function has a significant value.

9. A method as in Claim 1, further comprising retrieving aiding data for processing the positioning signal.
10. A method as in Claim 1, wherein the positioning signal comprises a signal from a global positioning system (GPS) satellite.
11. A method as in Claim 1, wherein the communication circuit initiates the frequency adjustment of the oscillator.
12. A method as in Claim 11, wherein the communication circuit comprises a receiver and transmitter for cellular telephone communication.
13. A method as in Claim 12, wherein the frequency adjustment of the oscillator adjusts the offset from a nominal frequency in a communication signal transmitted from a base station.
14. In a communication device, a method for determining an operating frequency of an oscillator based on a reference signal from a reliable time base, comprising:
- detecting a beginning time point of the reference signal received by the communication device;
  - upon detection of the beginning time point of the reference signal, enabling a counter to count in accordance with a clock signal derived from the oscillator;
  - detecting an ending time point of the reference signal received by the communication device;
  - upon detecting the ending time point of the reference signal, disabling the counter to stop the counter from further counting; and
  - determining the frequency of the oscillator based on the count in the counter and an expected time that elapsed between the beginning time point and the ending time point.
15. A method as in Claim 14, wherein the beginning time point and the ending time point represent a known duration in time.

16. A method as in Claim 14, wherein the beginning time point and the ending time point represent arrivals of recurring events in the reference signal, the recurring events recurs at a fixed frequency.

17. A method as in Claim 14, further comprising adjusting for processing times in the communication device for detecting the beginning time point and the ending time point.

18. A method as in Claim 1, wherein the recording comprises recording an indication that a frequency adjustment of the oscillator is made.

19. A method as in Claim 18, wherein the processing hypothesizes a frequency shift and time point of the frequency shift in the received positioning signal between the second time point and the third time point.

20. A method as in Claim 14, wherein the frequency of the oscillator thus determined is provided to a positioning signal receiver.

21. A method as in Claim 20, wherein the positioning signal receiver receives global positioning system (GPS) signals.

22. A mobile communication device, comprising:

a communication circuit;

a positioning signal receiver;

an oscillator shared between a communication circuit and a positioning signal receiver providing a frequency that is adjustable from the communication circuit; and

a central processing unit, wherein the central processing unit records a frequency adjustment of the oscillator, and processes the positioning signal, taking into consideration the frequency adjustment.

23. A mobile communication device as in Claim 22, wherein the central processing unit records the time point at which the frequency adjustment of the oscillator is made.

24. A mobile communication device as in Claim 23, the central processing unit hypothesizes a frequency shift in a portion of the received positioning signal received into the positioning signal receiver after the frequency adjustment.

25. A mobile communication device as in Claim 22, wherein the central processing unit records an amount by which the frequency of the oscillator is adjusted.

26. A mobile communication device as in Claim 22, wherein the central processing units hypothesizes a time point at which the frequency adjustment of the oscillator is made.

27. A mobile communication device as in Claim 22, wherein the central processing unit integrates a correlation function.

28. A mobile communication device as in Claim 27, wherein the central processing unit searches for a code phase for which the correlation function has a significant value.

29. A mobile communication device as in Claim 27, wherein the central processing unit searches for a Doppler frequency at which the correlation function has a significant value.

30. A mobile communication device as in Claim 27, wherein the central processing unit retrieves aiding data for processing the positioning signal.

31. A mobile communication device as in Claim 22, wherein the positioning signal comprises a signal from a global positioning system (GPS) satellite.

32. A mobile communication device as in Claim 22, wherein the communication circuit comprises a receiver and transmitter for cellular telephone communication.

33. A mobile communication device as in Claim 22, wherein the frequency adjustment of the oscillator adjusts the offset from a nominal frequency in a communication signal transmitted from a base station and received by the communication circuit.

34. An oscillator frequency determining apparatus in a communication device, comprising:

an oscillator providing a periodic output signal;

a receiver receiving a reference signal from a reliable time base;

a detector detecting a beginning time point and an ending time point of the reference signal received by the communication device;



a counter that begins counting the number of periods in the output signal of the oscillator in response to the detector detecting the beginning time point and stops counter in response to the detector detecting the ending time point of the reference signal; and

arithmetic unit for determining the frequency of the oscillator based on the count in the counter and an expected time that elapsed between the beginning time point and the ending time point.

35. An apparatus as in Claim 34, wherein the beginning time point and the ending time point represent a known duration in time.

36. An apparatus as in Claim 34, wherein the beginning time point and the ending time point represent arrivals of recurring events in the reference signal, the recurring events recurs at a fixed frequency.

37. An apparatus as in Claim 34, wherein the arithmetic unit further adjusts for processing times in the communication device for detecting the beginning time point and the ending time point.

38. A mobile communication device as in Claim 22, wherein the central processing unit records an indication that a frequency adjustment of the oscillator is made.

39. A mobile communication device as in Claim 38, wherein the central processing unit hypothesizes a frequency shift and time point of the frequency shift in the received positioning signal between the second time point and the third time point.

40. An apparatus as in Claim 34, wherein the frequency of the oscillator thus determined is provided to a positioning signal receiver.

41. An apparatus as in Claim 40, wherein the positioning signal receiver receives global positioning system (GPS) signals.

1/3



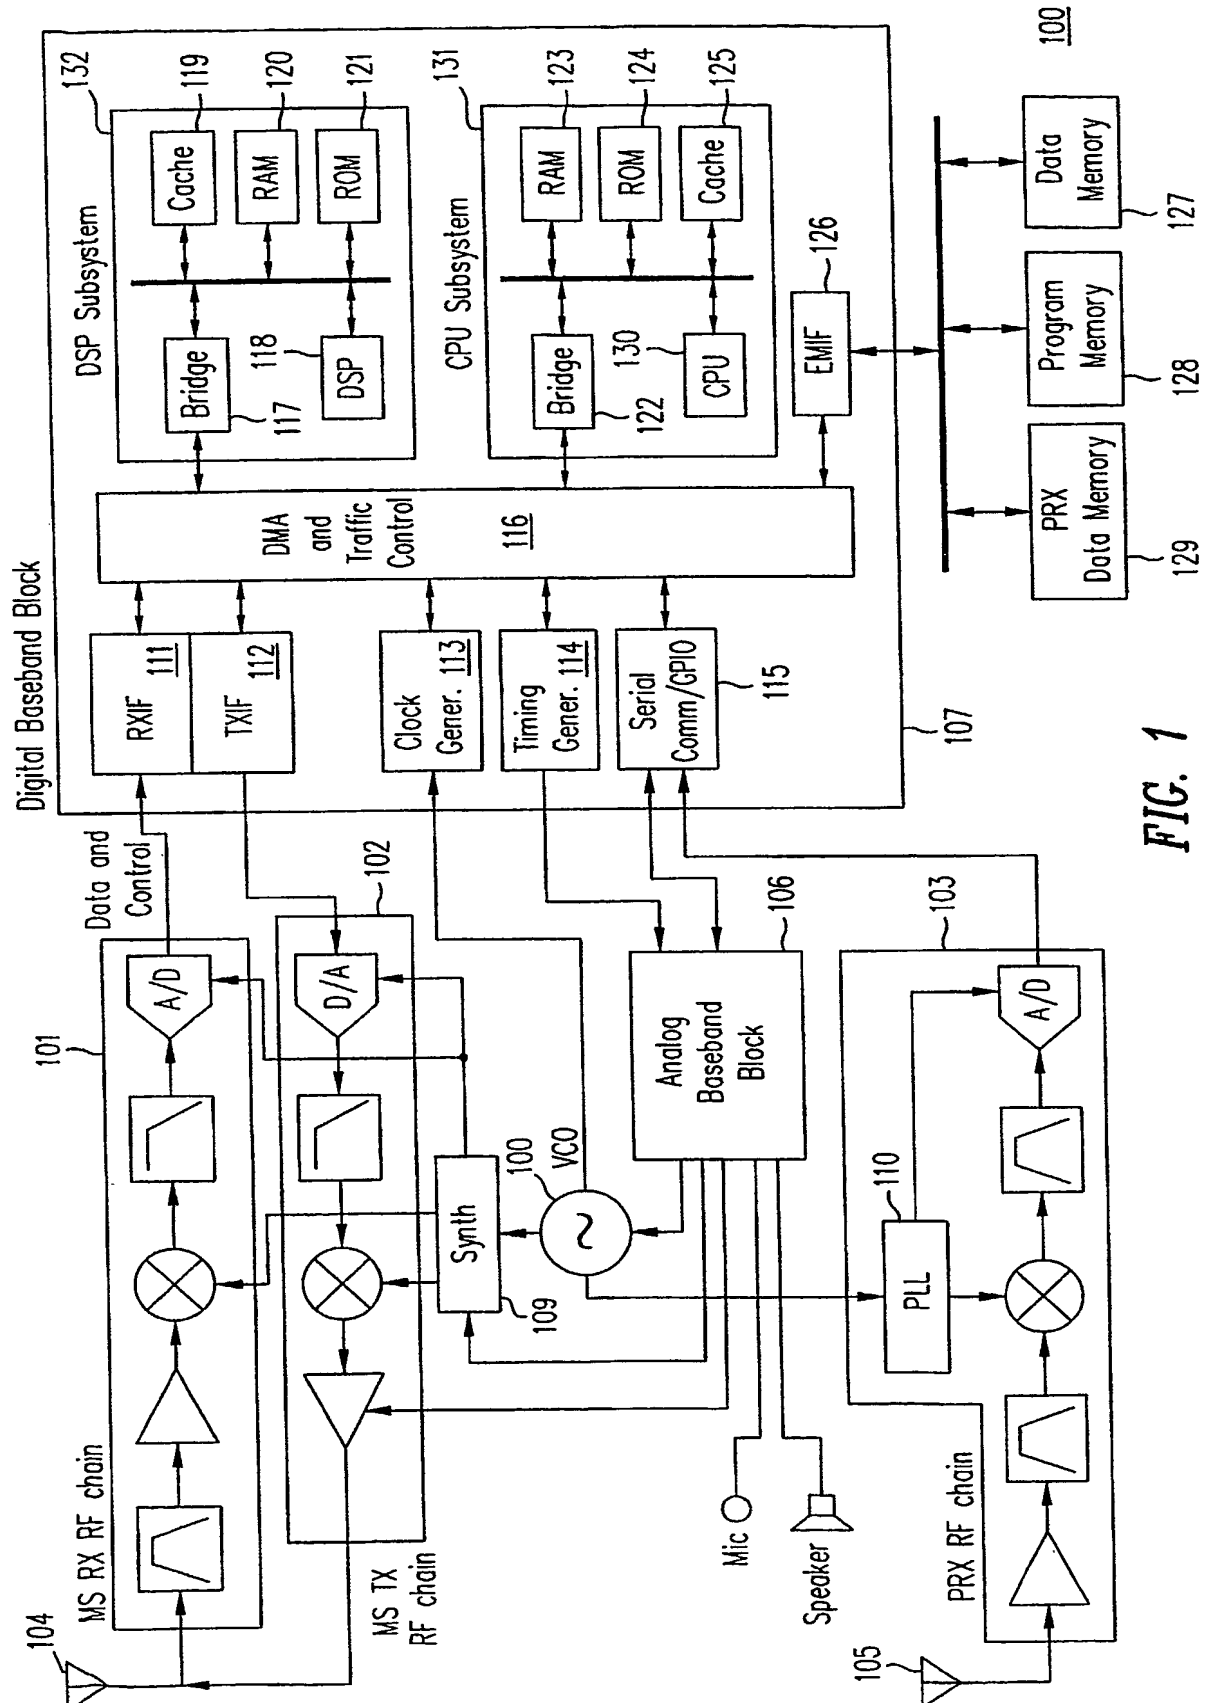


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2/3

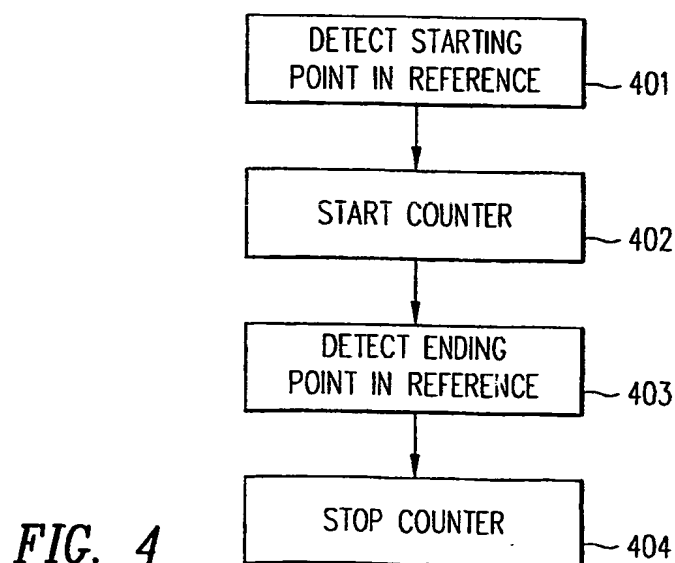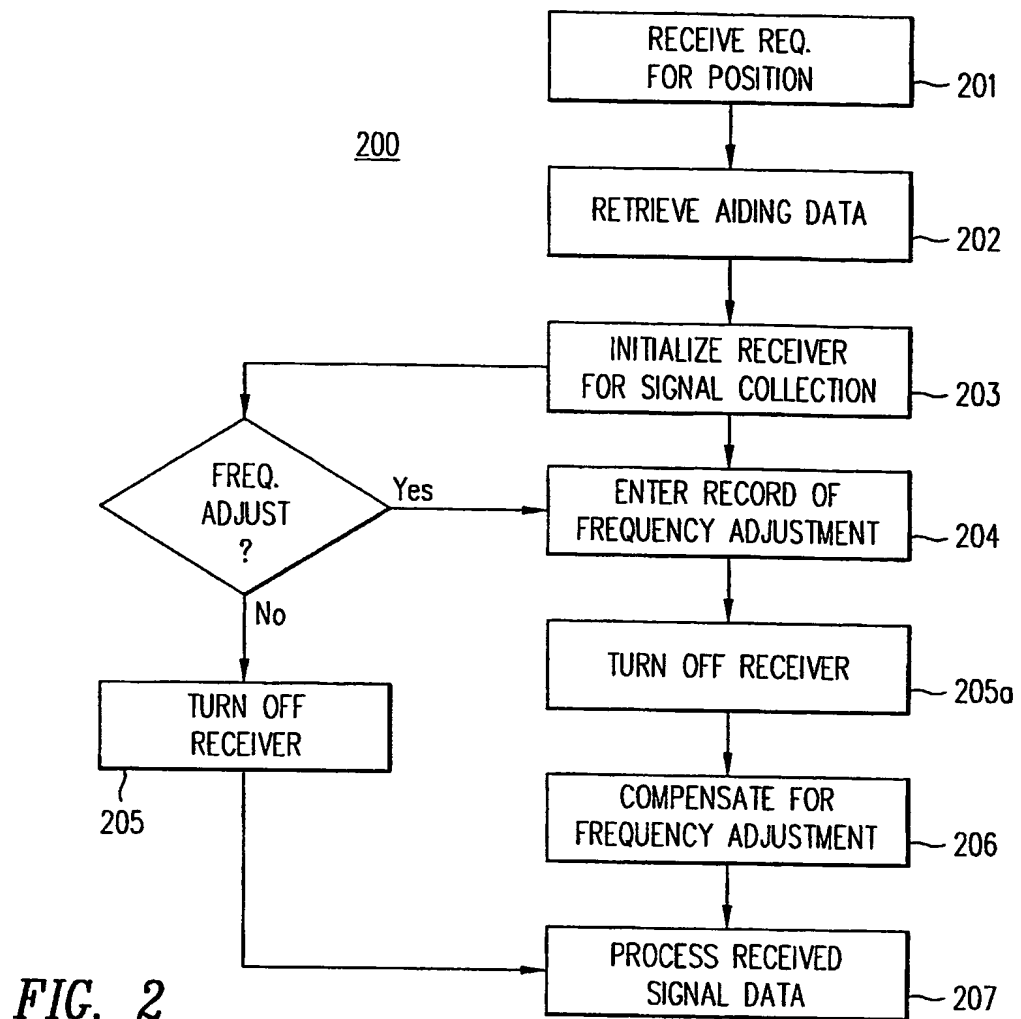

SUBSTITUTE SHEET (RULE 26)

3/3

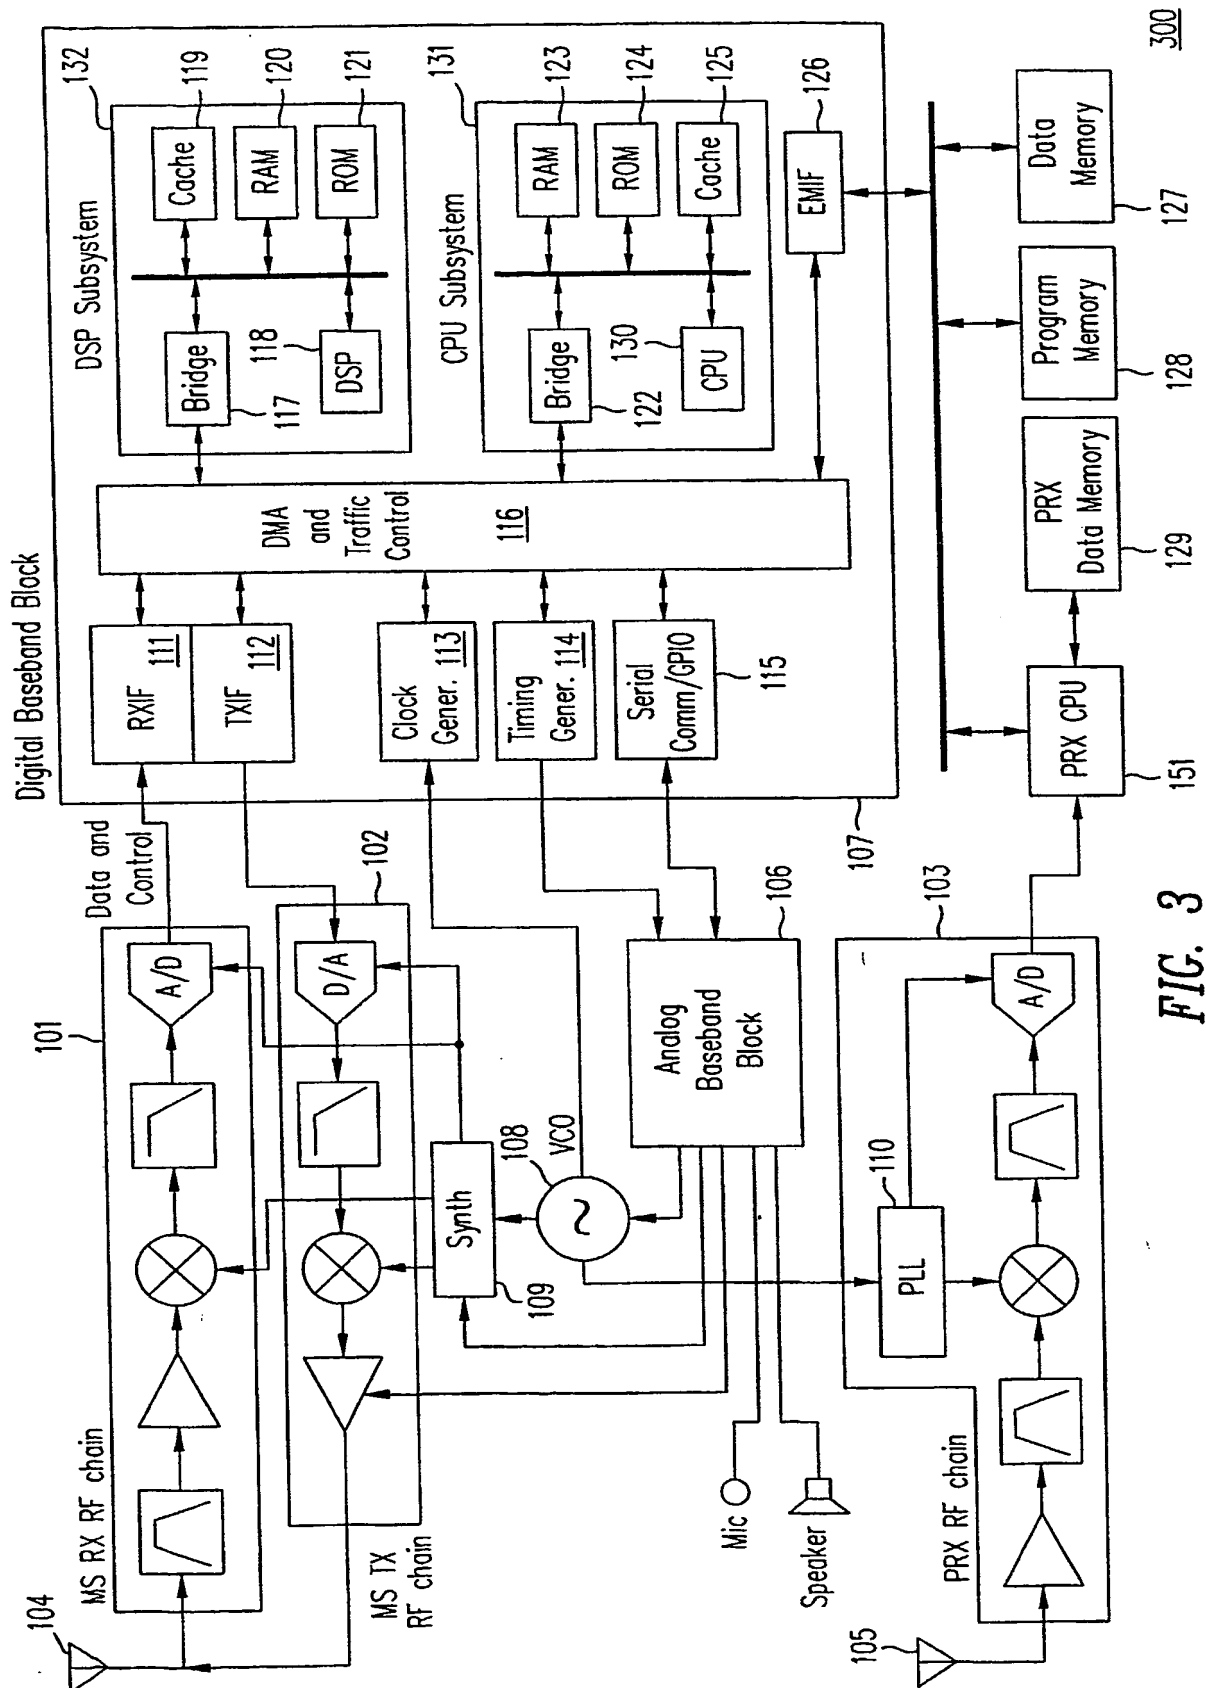


FIG. 3

SUBSTITUTE SHEET (RULE 26)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number  
**WO 2003/089952 A3**

(51) International Patent Classification<sup>7</sup>: G01S 1/04, H04B 1/38, G01S 1/02, H03J 7/04

(21) International Application Number:  
PCT/US2003/012115

(22) International Filing Date: 18 April 2003 (18.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/126,449 19 April 2002 (19.04.2002) US

(71) Applicant: SIRF TECHNOLOGY, INC. [US/US]; 148 E. Brokaw Road, San Jose, CA 95112 (US).

(72) Inventors: BLOEBAUM, L., Scott; 103 Battery Point Place, Cary, NC 27513 (US). BHARTI, Piyush; 173 Roseberry Avenue, London, Greater London EC1R 4UP (GB). CHUNG, Sherk; 2000 Crystal Springs Road, Apt. 24-12, San Bruno, CA 94066 (US). VAN ROY, Benjamin; 1501 Hillsdale Blvd. #103, San Mateo, CA 94402 (US). MANN, Wallace; 16 Madera Way, Mill Valley, CA 94941 (US).

(74) Agent: KWOK, Edward, C.; MacPherson Kwok Chen & Heid LLP, 2001 Gateway Place, Suite 195E, San Jose, CA 95110 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,

[Continued on next page]

(54) Title: COMPENSATION FOR FREQUENCY ADJUSTMENT IN A MOBILE COMMUNICATION-POSITIONING DEVICE WITH SHARED OSCILLATOR

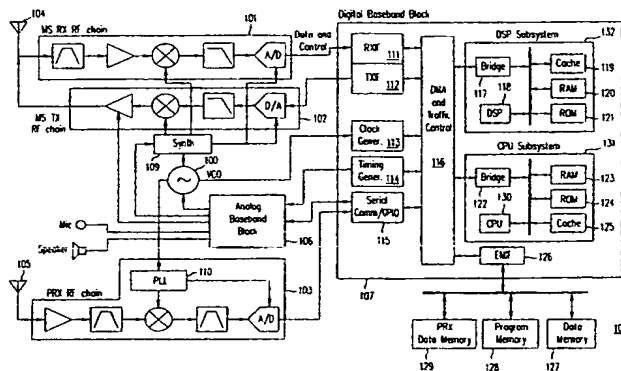

(57) Abstract: In a mobile communication device, a method for compensating for a frequency adjustment in an oscillator shared between a communication circuit and a positioning signal receiver is provided. In one embodiment, the method begins to receive and store a positioning signal at a first time point. When, at a second time point, the operating frequency of the shared oscillator is adjusted, the frequency adjustment is recorded. After the positioning signal is completely received and stored, the processing of the positioning signal takes into consideration the frequency adjustment. In that embodiment, the processing hypothesizes a frequency shift in the received positioning signal. According to another aspect of the present invention, a method for determining the operating frequency of an oscillator detects a beginning time point of a reference signal received by the mobile communication device and enables a counter to count in step with a clock signal derived from the oscillator. When an ending time point of the reference signal is received by the mobile communication device, the count is stopped, and the frequency of the oscillator is determined based on the count in the counter and an expected time that elapsed between the beginning time point and the ending time point.

WO 2003/089952 A3



UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

**Published:**

— with international search report

**(88) Date of publication of the international search report:**

1 April 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 03/12115

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01S1/04 H04B1/38 G01S1/02 H03J7/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S H04B H03J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 02 09310 A (BLOEBAUM LELAND SCOTT ;ERICSSON INC (US)) 31 January 2002 (2002-01-31)</p> <p>figure 1 page 9, line 18 - page 10, line 5 page 10, line 12 - line 22 page 13, line 13 - line 15 page 14, line 1 - line 8 page 15, line 10 - line 17 page 22, line 5 - line 8</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	<p>1-13, 18, 19, 22-33, 38, 39</p>

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

11 November 2003

Date of mailing of the international search report

12.12.03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hekmat, T

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 03/12115

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 57929 A (TRIMBLE NAVIGATION LTD) 11 November 1999 (1999-11-11)  figure 1 page 4, line 11 - line 13 page 16, line 7 - line 24 ----	1-13,18, 19, 22-33, 38,39
A	US 6 041 222 A (CAMP JR WILLIAM O ET AL) 21 March 2000 (2000-03-21)  figures 3,4 column 3, line 6 - line 10 column 12, line 65 -column 13, line 23 ----	1-13,18, 19, 22-33, 38,39
A	US 6 211 820 B1 (EDMONSTON BRIAN S ET AL) 3 April 2001 (2001-04-03)  figure 3 column 5, line 7 - line 28 ----	1-13,18, 19, 22-33, 38,39
A	WO 00 21223 A (ERICSSON INC) 13 April 2000 (2000-04-13) abstract; figures 1,2 ----	9
Y	US 5 950 120 A (GARDNER WILLIAM R ET AL) 7 September 1999 (1999-09-07)  figure 6 column 5, line 46 -column 6, line 7 column 6, line 26 - line 31 ----	14-17, 20,21, 34-37, 40,41
Y	EP 1 130 415 A (SONY CORP) 5 September 2001 (2001-09-05)  figures 2,8 column 3, line 58 -column 4, line 10 column 7, line 15 - line 24 column 11, line 43 - line 54 ----	14-17, 20,21, 34-37, 40,41
A	US 5 663 735 A (ESHENBACH RALPH F) 2 September 1997 (1997-09-02)  figure 1 column 4, line 23 - line 50 ----- -/--	14-17, 20,21, 34-37, 40,41

Form PCT/ISA/210 (continuation of second sheet) (July 1992)



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/12115

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 6 150 980 A (KRASNER NORMAN F)  21 November 2000 (2000-11-21)</p> <p>figure 1  column 12, line 42 - line 53  -----</p>	<p>14-17,  20, 21,  34-37,  40, 41</p>

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 03/12115

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-13, 18-19, 22-33, 38-39

A method for compensating for a frequency adjustment in an oscillator shared between a communication circuit and a positioning receiver.

2. Claims: 14-17, 20-21, 34-37, 40-41

A method for determining an operating frequency of an oscillator based on a reference signal from a reliable time base.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/12115

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0209310	A	31-01-2002	AU 7588201 A WO 0209310 A2	05-02-2002 31-01-2002
WO 9957929	A	11-11-1999	US 6122506 A TW 463511 B WO 9957929 A1	19-09-2000 11-11-2001 11-11-1999
US 6041222	A	21-03-2000	AU 745559 B2 AU 9217898 A BR 9812055 A CN 1285978 T EE 200000120 A EP 1020038 A1 JP 2001516985 T TR 200000638 T2 WO 9913595 A1 US 6424826 B1	21-03-2002 29-03-1999 26-09-2000 28-02-2001 15-12-2000 19-07-2000 02-10-2001 21-06-2000 18-03-1999 23-07-2002
US 6211820	B1	03-04-2001	AU 761917 B2 AU 5908799 A BR 9913551 A CA 2343237 A1 CN 1317092 T EP 1112511 A1 FI 20010420 A JP 2002524948 T WO 0014570 A1	12-06-2003 27-03-2000 23-04-2002 16-03-2000 10-10-2001 04-07-2001 02-03-2001 06-08-2002 16-03-2000
WO 0021223	A	13-04-2000	US 6415154 B1 AU 756164 B2 AU 1443300 A BR 9914268 A CN 1322300 T EP 1121772 A2 JP 2002527931 T PL 347889 A1 WO 0021223 A2	02-07-2002 09-01-2003 26-04-2000 03-07-2001 14-11-2001 08-08-2001 27-08-2002 22-04-2002 13-04-2000
US 5950120	A	07-09-1999	AU 7829598 A WO 9858453 A1	04-01-1999 23-12-1998
EP 1130415	A	05-09-2001	JP 2001242235 A EP 1130415 A2 US 2001020913 A1	07-09-2001 05-09-2001 13-09-2001
US 5663735	A	02-09-1997	NONE	
US 6150980	A	21-11-2000	US 5945944 A US 6208290 B1 US 5874914 A US 5841396 A US 6433734 B1 AU 5588898 A EP 1262790 A2 EP 0941487 A1 JP 2001505665 T WO 9825158 A1 US 6133874 A	31-08-1999 27-03-2001 23-02-1999 24-11-1998 13-08-2002 29-06-1998 04-12-2002 15-09-1999 24-04-2001 11-06-1998 17-10-2000

Form PCT/ISA/210 (patent family annex) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/12115

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6150980	A	AU 5587698 A	29-06-1998
		EP 0950194 A2	20-10-1999
		JP 2001505309 T	17-04-2001
		US 6185427 B1	06-02-2001
		US 6215441 B1	10-04-2001
		WO 9825157 A2	11-06-1998
		US 2001028321 A1	11-10-2001
		US 2002024461 A1	28-02-2002
		AU 2070297 A	22-09-1997
		AU 723615 B2	31-08-2000
		AU 7662096 A	30-04-1997
		BR 9611701 A	28-12-1999
		CA 2230841 A1	17-04-1997
		CN 1211324 A , B	17-03-1999
		EP 0855039 A2	29-07-1998
		EP 0885492 A1	23-12-1998
		JP 11513787 T	24-11-1999
		JP 2000506348 T	23-05-2000
		US 2002084933 A1	04-07-2002
		WO 9714049 A2	17-04-1997
		WO 9733382 A1	12-09-1997
		US 6064336 A	16-05-2000
		US 6111540 A	29-08-2000
		US 6400314 B1	04-06-2002
		US 6002363 A	14-12-1999

Form PCT/ISA/210 (patent family annex) (July 1992)

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**